

# TY Type


## 2.5 x 2.0 mm SMD Voltage Controlled Temperature Compensated Crystal Oscillator

### FEATURE

- Typical 2.5 x 2.0 x 0.7 mm ceramic SMD package.
- For automatic assembly.
- Compactness and lightweight.
- VCTCXO available.
- Low thickness


### TYPICAL APPLICATION

- GPS
- WiMAX, WLAN
- Mobile Phone

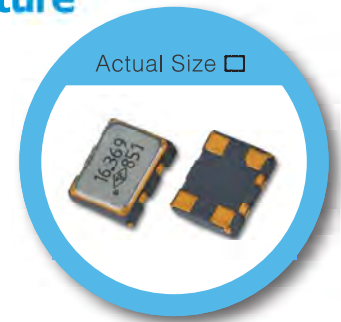


RoHS Compliant

### DIMENSION (mm)

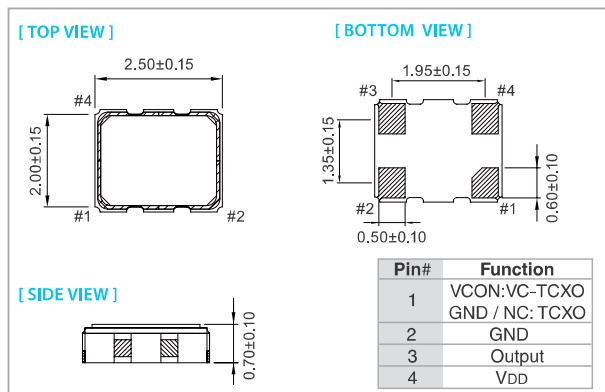

### SOLDER PAD LAYOUT (mm)

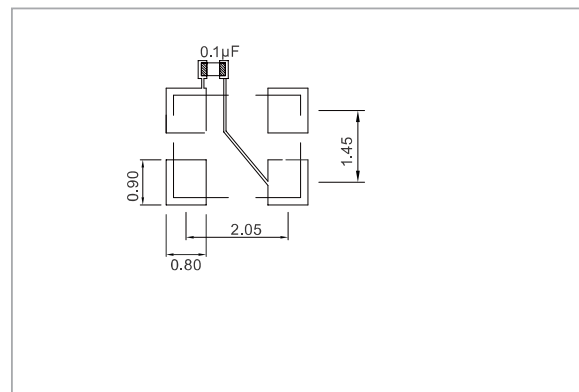

### ELECTRICAL SPECIFICATION

| Parameter                           | 3.3 / 3.0 / 2.8 V        |       | 2.5 V         |       | 1.8 V         |      | Unit   |
|-------------------------------------|--------------------------|-------|---------------|-------|---------------|------|--------|
|                                     | Min.                     | Max.  | Min.          | Max.  | Min.          | Max. |        |
| Supply Voltage Variation (VDD)      | 2.66                     | 3.465 | 2.375         | 2.625 | 1.71          | 1.89 | V      |
| Frequency Range                     | 10                       | 52    | 10            | 52    | 10            | 52   | MHz    |
| Standard Frequency                  | 16.369, 19.2, 26.0, 38.4 |       |               |       |               |      |        |
| Frequency Tolerance*                | -                        | ±2.0  | -             | ±2.0  | -             | ±2.0 | ppm    |
| Frequency stability                 |                          |       |               |       |               |      | ppm    |
| Vs Supply Voltage (±5%) change      | -                        | ±0.2  | -             | ±0.2  | -             | ±0.2 |        |
| Vs Load (±10%) change               | -                        | ±0.2  | -             | ±0.2  | -             | ±0.2 |        |
| Vs Aging (@ 1st year)               | -                        | ±1.0  | -             | ±1.0  | -             | ±1.0 | ppm    |
| Supply Current 10 MHz ≤ Fo ≤ 26 MHz | -                        | 1.5   | -             | 1.5   | -             | 1.5  | mA     |
| 26 MHz < Fo ≤ 52 MHz                | -                        | 2.0   | -             | 2.0   | -             | 2.0  |        |
| Output Level (Clipped sine wave)    | 0.8                      | -     | 0.8           | -     | 0.8           | -    | Vp-p   |
| Load                                | 10 KΩ // 10pF            |       | 10 KΩ // 10pF |       | 10 KΩ // 10pF |      |        |
| Control Voltage Range (VCTCXO)      | 0.5                      | 2.5   | 0.4           | 2.4   | 0.3           | 1.5  | V      |
| Pulling Range (VCTCXO)              | ±5.0                     | -     | ±5.0          | -     | ±5.0          | -    | ppm    |
| Vc Input Impedance (VCTCXO)         | 500                      | -     | 500           | -     | 500           | -    | kΩ     |
| Phase Noise @ 19.2 MHz              | 100 Hz                   | -115  | -115          | -115  | -115          | -115 | dBc/Hz |
|                                     | 1 kHz                    | -135  | -135          | -135  | -135          | -135 |        |
|                                     | 10 kHz                   | -148  | -148          | -148  | -148          | -148 |        |
| Start time                          | -                        | 2     | -             | 2     | -             | 2    | mSec   |
| Storage Temp. Range                 | -55                      | 125   | -55           | 125   | -55           | 125  | °C     |

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

\* Frequency at 25°C, 1 hour after reflow.

### FREQ. STABILITY vs. TEMP. RANGE

| Temp. (°C) | ppm  |      |      |      |      |
|------------|------|------|------|------|------|
|            | ±0.5 | ±1.0 | ±1.5 | ±2.0 | ±2.5 |
| -20 ~ +70  | ○    | ○    | ○    | ○    | ○    |
| -30 ~ +85  | ○    | ○    | ○    | ○    | ○    |
| -40 ~ +85  | ○    | ○    | ○    | ○    | ○    |

\* ○ : Available △ : Conditional X : Not available