

Helping Customers Innovate, Improve & Grow

Table 1. Electrical Performance


Parameter	Symbol	Min.	Typ	Max	Units
Nominal Frequency	F _{NOM}	7.000		200.000	MHz
Mode		Fundamental, 3rd, 5th Overtone			
Operating Temperature Range	T _{OP}	0/70, -10/70, -20/70, -40/85			°C
Stability Over T _{OP} ¹	F _{STAB}	±10		±100	ppm
Frequency Tolerance ²	F _{TOL}		±10		ppm
Load Capacitance	C _L	6		32	pF
Shunt Capacitance	C _o			5	pF
Drive Level			10	100	uW
Aging / 1st year (at 25 °C)	F _{AGE}			±5	ppm
Insulation Resistance		500			MOhm
Storage Temperature	T _{STO}	-40		90	°C
Equivalent Series Resistance					
Crystal Frequency	ESR				Ohm
7.000MHz-20.000MHz				30	
20.001MHz-50.000MHz				25	
40.001MHz-120.000MHz, 3rd Overtone				40	
80.000MHz-200.000MHz, 5th Overtone				100	

Notes:

1. Referenced to the Frequency at 25 °C.
2. Frequency measured at 25 °C ± 3 °C.

Product is compliant to RoHS directive and fully compatible with lead free assembly. 

Package Drawing

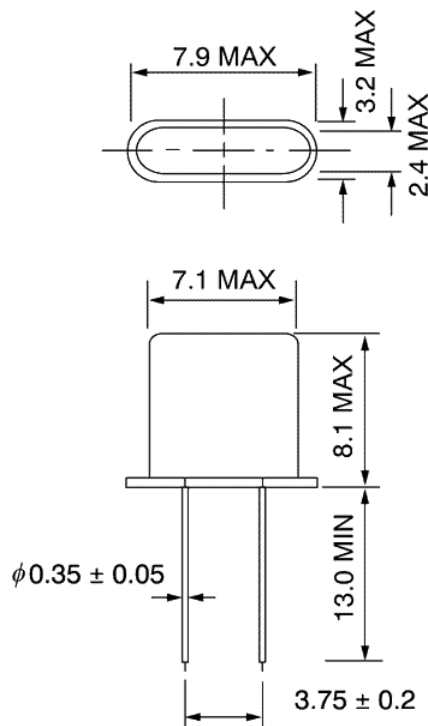

All Dimensions in mm