



# CXOX/CXOXHG OSCILLATOR

1 MHz to 160 MHz  
Ultra-Miniature, High Stability  
High Shock Crystal Oscillator

## DESCRIPTION

Statek's ultra miniature and ultra low profile CXOX/CXOXHG oscillators consist of a CMOS/TTL compatible hybrid circuit and a state-of-the-art, miniature, fundamental-mode crystal.

## FEATURES

- High shock resistance (HG version)
- CMOS and TTL compatible
- Low power consumption
- Full military testing available
- Low acceleration sensitivity (HG version)
- Optional Output Enable/Disable with Tri-State
- Low EMI emission
- Hermetically sealed ceramic package
- Designed and manufactured in the USA

## APPLICATIONS

### Military & Aerospace

- Smart munitions
- Communications
- Navigation
- GPS

### Industrial, Computer & Communications


- Miniature clock oscillator
- Handheld instrumentation
- PDA
- Transponder/Animal migration

### Medical

- Test & diagnostic equipment
- Handheld devices



## DIMENSIONS

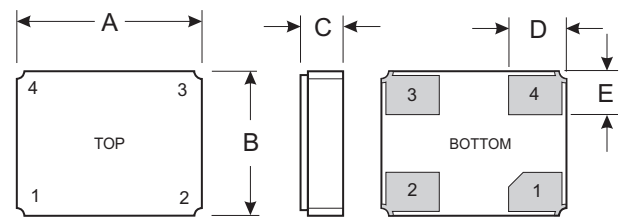


DIM	TYPICAL		MAXIMUM	
	inches	mm	inches	mm
A	0.126	3.20	0.136	3.40
B	0.099	2.50	0.107	2.70
C (SM1)	0.039	1.00	0.043	1.09
C (SM3/SM5)	0.044	1.12	0.048	1.21
D	0.040	1.00	0.041	1.10
E	0.030	0.75	0.031	0.85

## PIN CONNECTIONS

1. Output Enable/Disable (E) or no connection (N)
2. Ground
3. Output
4.  $V_{DD}$

## SUGGESTED LAND PATTERN

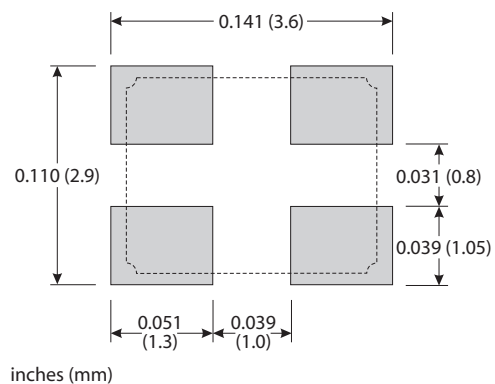

10168 Rev D



## SPECIFICATIONS

Specifications below are examples. Specifications are subject to change without notice. Tighter specifications available. Please contact factory.

Frequency Range <sup>1</sup>	1 MHz to 160 MHz		
Supply Voltage	1.8 V to 5.0 V ± 10%		
Calibration Tolerance <sup>2</sup>	± 100 ppm		
Frequency Stability Over Temperature <sup>3</sup>	± 50 ppm for Commercial ± 100 ppm for Industrial ± 100 ppm for Military		
Supply Current (Typical)	<u>1.8V</u>	<u>3.3V</u>	<u>5.0V</u>
24 MHz	1.5 mA	3.0 mA	8.0 mA
32 MHz	2.0 mA	5.0 mA	10.0 mA
50 MHz	3.0 mA	6.0 mA	13.0 mA
130 MHz	12.0 mA	23.0 mA	39.0 mA
Output Load (CMOS) <sup>4</sup>	15 pF		
Start-up Time	5 ms MAX		
Rise/Fall Time	6 ns MAX		
Duty Cycle	45% MIN 55% MAX		
Aging, first year	5 ppm MAX		
Shock, survival <sup>5</sup>	5,000 g, 0.3 ms, 1/2 sine HG: 10,000 g, 0.5 ms, 1/2 sine <sup>6</sup>		
Vibration, survival <sup>6</sup>	20 g, 10-2,000 Hz swept sine		
Operating Temp. Range	-10°C to 70°C (Commercial) -40°C to 85°C (Industrial) -55°C to 125°C (Military)		

- Not all frequencies available at all voltages. Contact factory.
  - Tighter tolerances available.
  - Does not include calibration tolerances. Tighter tolerances available.
  - Higher CMOS loads and TTL loads available. Contact factory.
  - Higher shock version available. Contact factory for requirements above 10,000 g
  - Per MIL-STD-202G, Method 204D, Condition D. Random vibration testing also available.
- Note: All parameters are measured at ambient temperature with a 10 MΩ, 15 pF load.

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage $V_{DD}$	-0.5 V to 7.0 V
Storage Temperature	-65°C to 125°C
Maximum Process Temperature	260°C for 20 seconds

## ENABLE/DISABLE OPTIONS (E/N)

Statek offers two enable/disable options: E and N. The E-version has a Tri-State output and stops oscillating internally when the output is put into the high Z state. The N-version does not have PIN 1 connected internally and so has no enable/disable capability. The following table describes the Enable/Disable option E.

### ENABLE/DISABLE OPTION E FUNCTION TABLE

	Enable (Pin 1 High*)	Disable (Pin 1 Low)
Output	Frequency Output	High Z State
Oscillator	Oscillates	Stops
Current	Normal	Very Low

\*When PIN 1 is allowed to float, it is held high by an internal pull-up resistor.

## PACKAGING OPTIONS

CXOX/	- Tray Pack
CXOXHG	- 12 mm tape, 7" or 13" reels
	Per EIA 481 (see Tape and Reel data sheet #10109)

## HOW TO ORDER CXOX/CXOXHG SURFACE MOUNT CRYSTAL OSCILLATORS

