

VF540

XO 3.3V, 5.0V

9x14mm SMD, HCMOS/TTL



DESIGN FEATURES

- Very Low Phase Jitter at all Frequencies
- Extended Temperature available
- Tight Duty Cycle available
- Tristate Control Standard
- EMI Shielded

RoHS Status




Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Frequency Range	F		1.5		130	MHz	
Frequency Stability	$\Delta F/F$	Overall conditions of : calibration, temp., 10 years aging, shock, vibration			± 20 ± 25 ± 50 ± 100 ± 500	ppm	See "How to Order" chart
Operating Temperature	T		0 -40 -55		+70 +85 +125	°C	
Output	HCMOS / TTL						
Load	10 TTL gates or 50pF max.						
Supply Voltage	V_{CC}		4.75 3.15	5.00 3.30	5.25 3.45	V	See "How to Order" chart
Supply Current	I_{CC}	15pF load, 50MHz			40	mA	Load & Frequency dependent
Duty Cycle		@1.4V	40	50	60	%	5%, 2.5% available
Rise / Fall Time	T_R/T_F	0.4V to 2.4V 20% to 80%			1.5 4.0	ns	
Logic "1" Level	V_{OH}	Max Load	0.9 V_{CC}			V	
Logic "0" Level	V_{OL}	Max Load			0.1 V_{CC}	V	
Start-up Time	T_S			2	10	ms	
Phase Jitter		1 σ			1	ps	fj>1kHz

Pin Connections

Pin #	Connection
1	Tristate Control
2	Case/GND
3	Output
4	V _{CC}

Package Dimensions

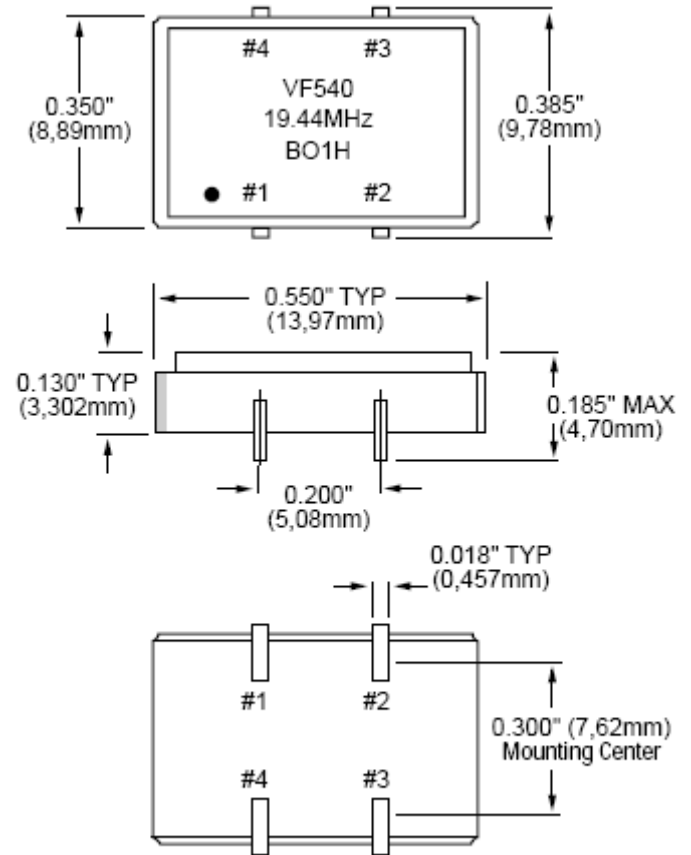

All dimensions are typical unless otherwise specified.

ORDERING INFORMATION

