


# MS3V-T1R

Tuning Fork Crystal 32 kHz – 100 kHz



## DIMENSIONS

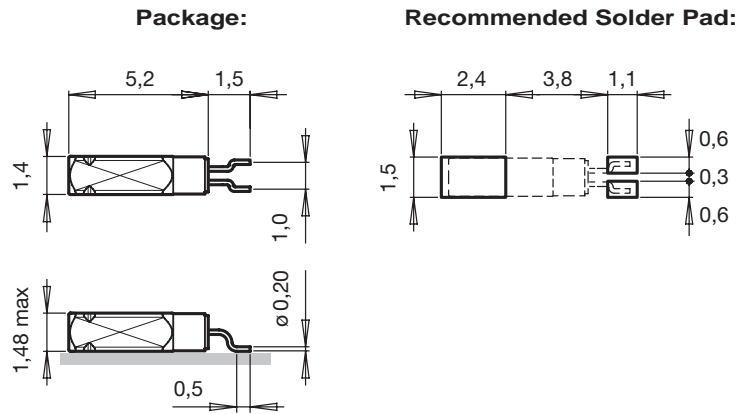

All dimensions in mm typical

## APPLICATIONS

IoT  
Metering  
Wearables  
Health Care  
Mobile Phones  
Consumer Electronics

## DESCRIPTION

The MS3V-T1R is a low frequency surface mount technology Quartz Crystal Unit that incorporates a tuning fork Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed square-bodied metal can package.

## FEATURES

High stability is guaranteed by hermetic sealing.  
High shock and vibration resistant.  
Small, proven surface mount technology package for reflow soldering.  
Excellent lead coplanarity for surface mounting.  
RoHS-compliant.

## ELECTRICAL CHARACTERISTICS AT 25°C

Standard Frequency	<sup>1)</sup> F <sub>L</sub>	32.768	kHz
Load capacitance	<sup>2)</sup> C <sub>L</sub>	6.0 / 7.0 / 9.0 / 12.5	pF
Frequency tolerance	<sup>3)</sup> ΔF/F	±20	ppm
	ΔF/F	±100	ppm
Series resistance typ./max.	R <sub>S</sub>	50 / 65	kΩ
Motional capacitance typ.	C <sub>1</sub>	2.25	fF
Static capacitance typ.	C <sub>0</sub>	0.9	pF
Drive level max.	P	1.0	μW
Insulation resistance min.	R <sub>i</sub>	500	MΩ
Aging first year max.	ΔF/F	±3	ppm
Turnover temperature	T <sub>0</sub>	25 ±5	°C
Frequency vs. temperature	ΔF/F <sub>0</sub>	-0.035 ppm/°C <sup>2</sup> (T - T <sub>0</sub> ) <sup>2</sup> ±10%	ppm

- 1) Other frequencies on request.  
2) Other load capacitances on request.  
3) Tighter and wider frequency tolerances on request.