



actual size

# SMD Quartz Crystal · JXS53

4 Pad Version · 5.0 x 3.2 mm

- seam sealed ceramic/metal package
- extended temperature ranges available
- high mechanical reliability type available
- for automotive type, see automotive datasheet



RoHS compliant



Pb free: pins / pads

## General Data

type	JXS53	
frequency range	8.0 ~ 56.0 MHz	(fund. AT-cut)
	50.0 ~ 125.0 MHz	(3rd OT AT-cut)
frequency tolerance at 25 °C	± 10 ppm / ± 30 ppm / ± 50 ppm	
load capacitance $C_L$	12 pF	standard (option 8 pF ~ 32 pF / series)
shunt capacitance $C_0$	< 7 pF	
storage temperature	-40 °C ~ +125 °C	
drive level max.	100 µW	
aging	< ± 3 ppm first year	(option: < ± 1 ppm first year for tol. ± 10 ppm)

## ESR (series resistance Rs)

frequency in MHz	vibration mode	ESR max. in $\Omega$	ESR typ. in $\Omega$
8.0 ~ 9.999	fund. - AT	100	50
10.0 ~ 10.999	fund. - AT	50	30
11.0 ~ 11.999	fund. - AT	40	25
12.0 ~ 21.999	fund. - AT	40	20
22.0 ~ 24.999	fund. - AT	40	15
25.0 ~ 49.999	fund. - AT	30	15
50.0 ~ 56.000	fund. - AT	40	20
50.0 ~ 79.999	3rd OT - AT	100	60
80.0 ~ 125.000	3rd OT - AT	80	60

## Frequency Stability vs. Temperature

		± 10 ppm	± 15 ppm	± 20 ppm	± 30 ppm	± 50 ppm	± 100 ppm
-20 °C ~ +70 °C	STD.	○	○	○	○	○	○
-40 °C ~ +85 °C	T1		○	○	○	○	○
-40 °C ~ +105 °C	T2					○	○
-40 °C ~ +125 °C	T3						○

○ available

## Marking

frequency with load capacitance code  
company code / date code / internal code


date code: year/month

example: 2A = 2012 January

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F

July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

## Dimensions

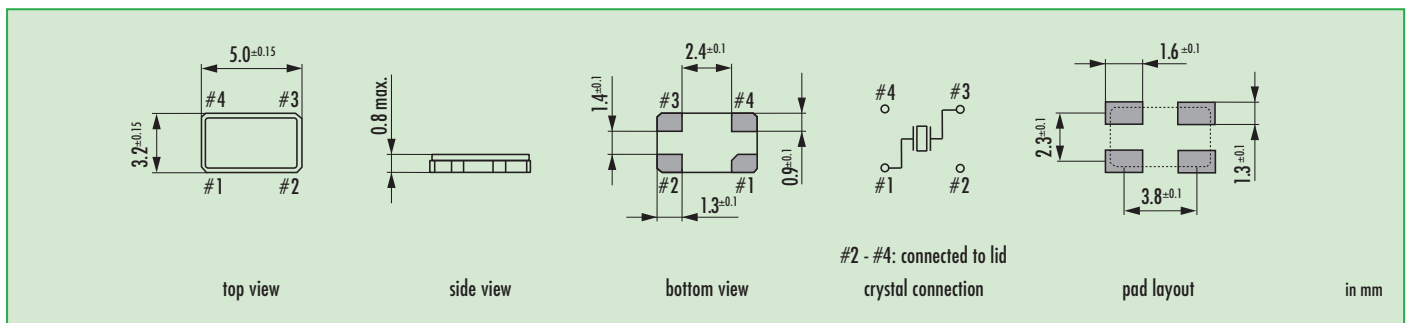

## Order Information

Q	frequency	type	load capacitance	stability at 25 °C	stability vs. temp. range	option
Quartz	8.0 ~ 125.0 MHz	JXS53	12 pF standard 8 pF ~ 30 pF S for series	10 = ± 10 ppm 30 = ± 30 ppm 50 = ± 50 ppm	10 = ± 10 ppm 15 = ± 15 ppm 20 = ± 20 ppm 30 = ± 30 ppm 50 = ± 50 ppm 100 = ± 100 ppm	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C FU = for fundamental frequencies ≥ 20 MHz 3OT = 3rd overtone HMR = high mechanical reliability (3000g/half sine wave/0.3ms)

Example: Q 30.0-JXS53-12-30/30-FU-LF (Suffix LF = RoHS compliant / Pb free pins or pads)

