



OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS (Operating Temp -20 ~ +80°C)

PART NUMBER *	3 dB BANDWIDTH (KHz) MIN.	20 dB BANDWIDTH (KHz) MAX.	INSERTION LOSS (dB) MAX.	SPURIOUS (dB) MIN. (9-12 MHz)
L10.7 MA20□	330 ±50	680	4 ±2	30
L10.7 MA5□	280 ±50	650	6 ±2	30
L10.7 MA5A10□	280 ±50	590	2.5 ±2	30
L10.7 MS2□	230 ±50	600	6 ±2	40
L10.7 MS2A10□	230 ±50	520	3 ±2	35
L10.7 MS3□	180 ±40	520	7 ±2	40
L10.7 MS3A10□	180 ±40	520	3 ±2	35
L10.7 MJ□	150 ±40	400	10 ±2	38
L10.7 MJA10□	150 ±40	360	4.5 ±2	35
L10.7 MHY□	110 ±30	350	7 ±2	30


Input/Output impedance 330 Ohms, Fo tolerance ±30 KHz

□ = Indicator (Fo), Complete part number to include indicator i.e. L10.7MA5C (C=10.73 MHz)


CENTER FREQUENCY INDICATORS

SPECIFICATION (Fo) MHz	10.64	10.67	10.70	10.73	10.76
INDICATOR	D	B	A	C	E

PACKAGE DIMENSIONS (mm)

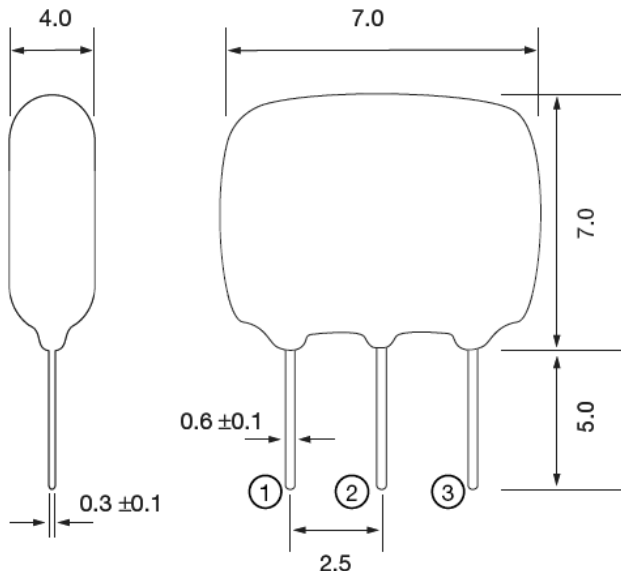

PIN CONNECTIONS	
#1	In/Out
#2	Ground
#3	Out/In

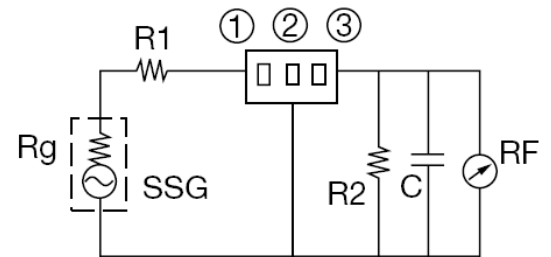

$$R_g + R_1 = R_2 = 330 \Omega$$

$$C = 10 \text{ pF}$$

Figure 1) Front and Side Views

Figure 2) Test Circuit