

- ▶ Low profile
- ▶ 4.0 x 2.5 mm Footprint
- ▶ Extended Temp Range Option
- ▶ RoHS Compliant

ECX-42

SMD QUARTZ CRYSTAL

The miniature ECX-42 is a compact SMD Crystal. The 4.0 x 2.5 x 0.8 mm ceramic package is ideal for today's SMD manufacturing environment.



OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECX-42			UNITS
		MIN	TYP	MAX	
Frequency Range		12.000		50.000	MHz
Frequency Tolerance	at +25°C			± 30 *	ppm
Frequency Stability	-10 to +70°C			± 50 *	ppm
Shunt Capacitance				5	pF
Load Capacitance	Specify in P/N		12		pF
Drive Level				300	µW
Operating Temperature		-10		+70	°C
Storage Temperature		-55		+125	°C
Aging (Per Year)	@ +25°C ±3°C			±5	ppm

EQUIVALENT SERIES RESISTANCE/MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω	FREQUENCY RANGE (MHz)	MODE OF OSC	MAX ESR Ω
12.00 ~ 15.999	Fundamental	80	20.000 ~ 23.999	Fundamental	50
16.000 ~ 19.999	Fundamental	60	24.000 ~ 50.000	Fundamental	40

DIMENSIONS (mm)

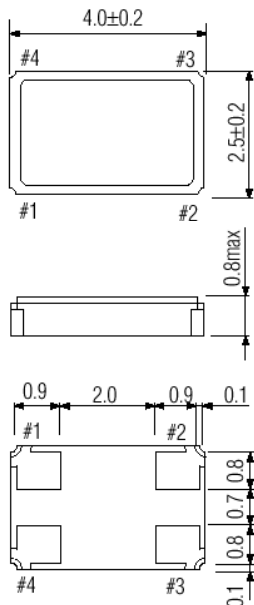

Pad Connections	
1	In/Out
2	Gnd
3	Out/In
4	Gnd

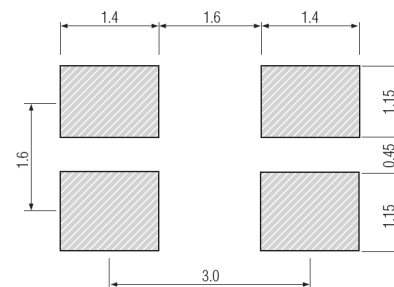


Figure 2) Suggested Land Pattern

Figure 1) Top, Side, Bottom and End views

Custom Options

PART NUMBERING GUIDE: Example ECS-200-20-42-TR