

MINIATURE CERAMIC SMD TUNING FORK CRYSTAL (4.1 x 1.5 x 0.9mm)

FEATURES:



- SMALLEST CERAMIC SMD PACKAGE TUNING FORK
- EXCELLENT HEAT RESISTANCE
- -40°C ~ 85°C OPERATING TEMPERATURE



■ SPECIFICATION

FREQUENCY RANGE	32.768kHz
FREQUENCY TOLERANCE @ 25°C	STD: ±20ppm Option: ±10ppm available (Consult factory)
TEMPERATURE COEFFICIENT	-0.034ppm ±0.006ppm / °C ²
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
STORAGE TEMPERATURE RANGE	-55°C ~ 125°C
TURN OVER TEMPERATURE	25°C ± 5°C
LOAD CAPACITANCE	STD: 12.5pF Option: 7pF, 9pF
SHUNT CAPACITANCE	1.1pF typ.
MOTIONAL CAPACITANCE	0.002pF typ.
EQUIVALENT SERIES RESISTANCE	70kΩ max.
INSULATION RESISTANCE	500MΩ min. @ 100V _{DC} ± 15V _{DC}
DRIVE LEVEL	0.1μW typ. 1.0μW max.
AGING @ 25°C ± 3°C	±3.0ppm / 1 st year max.
QUALITY FACTOR	20000 min.
SHOCK	±5.0ppm max.
VIBRATION	±5.0ppm max.


■ PACKAGE DIMENSIONS



Unit : mm


Pin Configuration	
1	Xtal
2	Xtal

■ SOLDER PATTERN




Unit :mm

■ REFLOW PROFILE

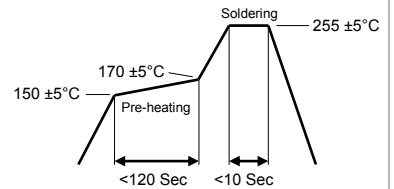

Note: Consult factory for detail

■ PART NUMBERING GUIDE

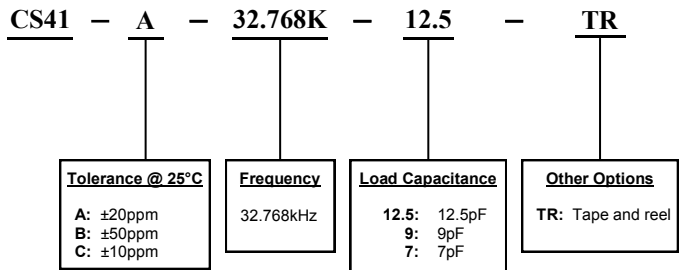

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.