

# Ceramic Surface Mount

- 1.25 mm height
- Glass-sealed housing for high reliability

- Two industry standard footprints
- Economic cost

Series **CX12A**  
**CX12B**




## Part Numbering Example: CX12A Z - A1 B2 C2 60 - 9.83 D18 - 3

CX12A	Z	A1*	B2	C2	60	9.83	D18	-3
SERIES	ADDED FEATURES	OPERATING TEMP.	STABILITY	TOLERANCE	RESISTANCE	FREQUENCY	LOAD CAP.	OVERTONE
CX12A	BLANK = BULK PACK Z = TAPE AND REEL	A0 = -10°C ~ +60°C A1 = -10°C ~ +70°C A2 = -40°C ~ +85°C	B1 = ±100 B2 = ± 50 B3 = ± 30 B4 = ± 10	C1 = ±100 C2 = ± 50 C3 = ± 30 C4 = ± 10	SEE CHART BELOW		D16, 18, 20, ETC. DS = SERIES	BLANK: FUND. -3: 3rd OT

*\*NOTE: The above ABC combinations cover basic specification options. We tailor our crystal specifications to meet customer requirements. Please contact our sales department if you don't see exactly what you need.*

### Specifications:

<b>Frequency Range:</b>	9.83 ~ 100.000 MHz
<b>Operating Temperature:</b>	-10°C ~ +60°C <i>Standard</i> -40°C ~ +85°C
<b>Frequency Stability:</b>	±100 ppm <i>Standard</i> ± 50 ppm
<b>Frequency Tolerance:</b>	± 50 ppm <i>Standard</i> (at 25°C)
<b>Load Capacitance:</b>	Standard 18 pF or series. Other values are available.
<b>Resistance:</b>	Maximum resistance corresponds to frequency. See chart below.
<b>Standard:</b>	Mode: Fundamental or 3rd Overtone Shunt Capacitance: 5 pF Max Aging: ± 5 ppm/year Drive Level: 0.1 mW Packaging: Tape and Reel (1K per Reel)

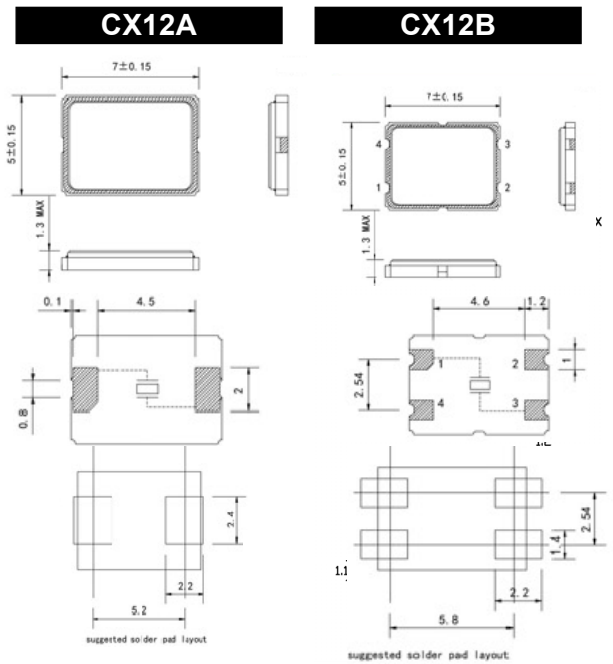

### Resistance Chart: All resistances are maximum values.

Frequency Range	ESR ( Ω )	Mode
5,5000 - 8,0000MHz	80Max	Fundamental
8,0000 - 10,000MHz	60Max	Fundamental
10,000 - 14,000MHz	50Max	Fundamental
14,000 - 20,000MHz	40Max	Fundamental
≥20,000MHz	30Max	Fundamental
24,000 - 35,000MHz	100Max	Third Overtone
≥35,000MHz	80Max	Third Overtone