


SX1555-R Series


3.8x8.0x2.5 mm - 32.768 kHz, Surface Mount Crystal



ACTUAL SIZE

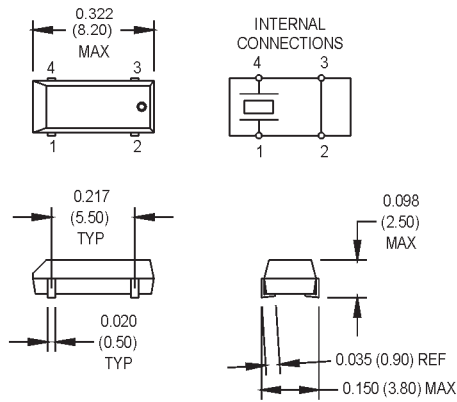

SUGGESTED SOLDER PAD LAYOUT




All dimensions in inches (mm).

Electrical/Environmental Specifications

	PARAMETERS	VALUE
Electrical Specifications	Frequency	32.768 kHz
	Tolerance @ +25°C	±20 ppm
	Aging	±5 ppm/yr. Max.
	Shunt Capacitance	1.35 – 1.50 pF, Typical
	Load Capacitance	12.5 pF, Typical
	Standard Operating Temperature	-40°C to +85°C
	Storage Temperature	-55°C to +125°C
	Equivalent Series Resistance (ESR), Max.	50 Kohms
	Resonance	Parallel
	Quality Factor	40,000 Min.
	Turnover Temperature	+25°C to ±5°C
	Parabolic Curvature Constant	-0.034 ppm/°C ² , Typical (See Fig 1)
	Drive Level	1.0 µW Max.
Environmental	Solder Conditions	+260°C for 10 seconds max.
	Mechanical Shock	MIL-STD-202, Method 213, C
	Vibration	MIL-STD-202, Method 201 & 204
	Thermal Cycle	MIL-STD-883, Method 1010, B


Contact the factory for specifications not listed.

Figure 1

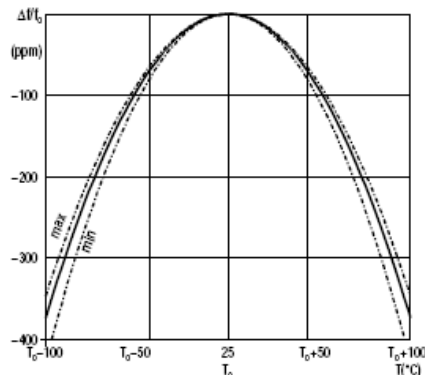

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

MtronPTI Lead Free Solder Profile

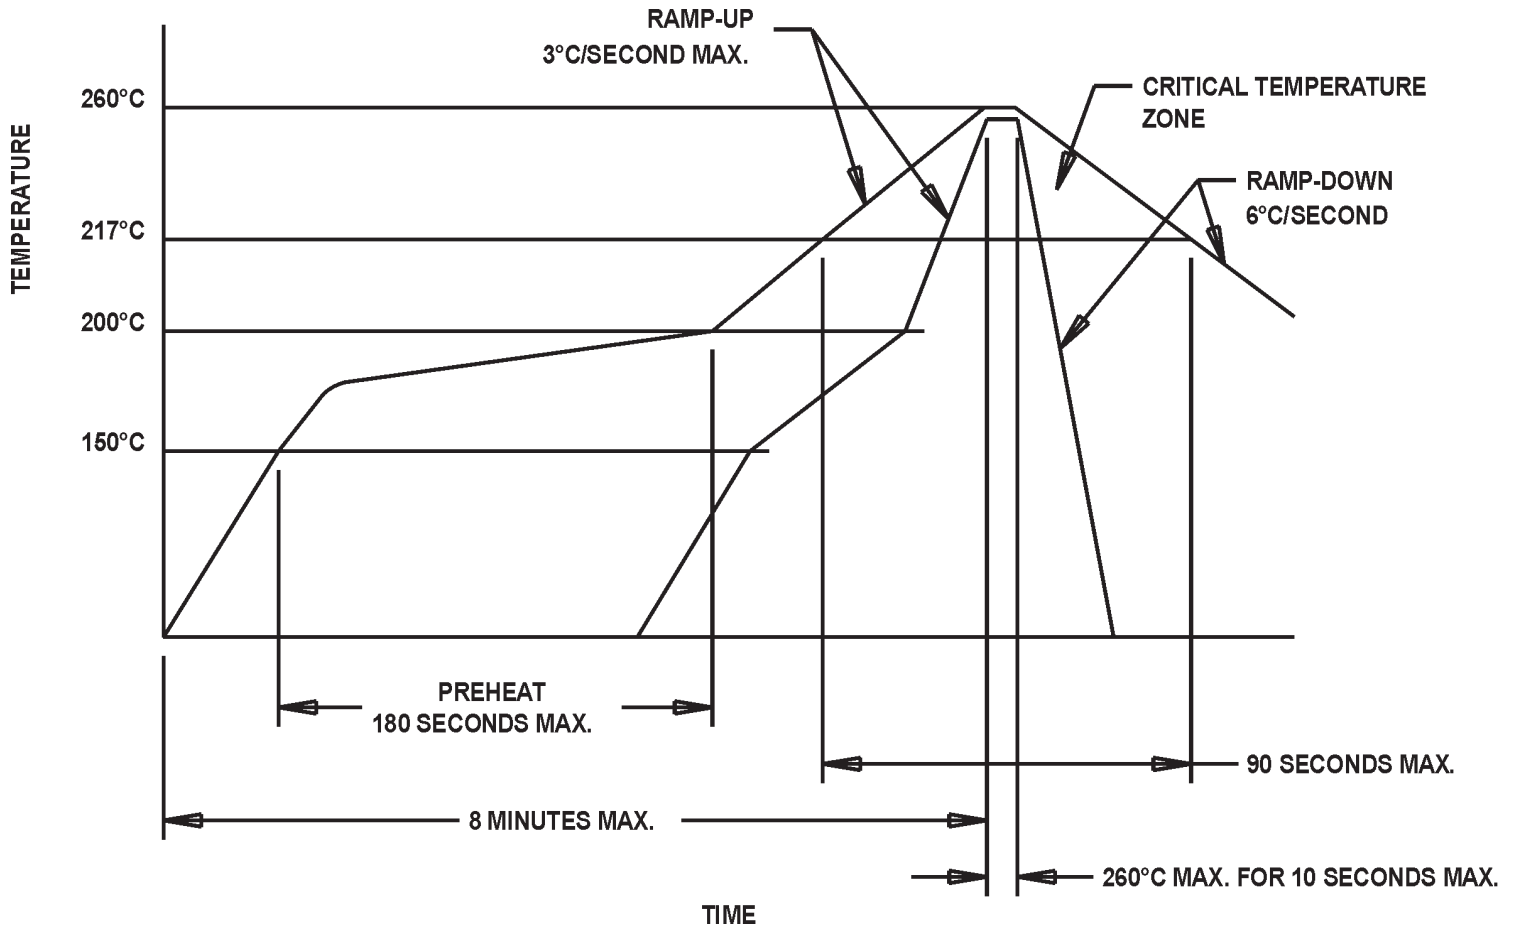

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

