




CCSS-945 Model


9×14 mm SMD, 5.0V, SineWave




Frequency Range:	10 MHz to 125 MHz
Frequency Stability Options(ppm)	±20, ±25, ±50
Temperature Range:	(standard) 0°C to 70°C
	(Option M) -20°C to +70°C
	(Option X) -40°C to +85°C
Storage:	-45°C to +90°C
Input Voltage:	5.0V ± 0.5V
Input Current:	30mA Max
Output:	True SineWave
Output Power:	+5 dBm Min, +7 dBm Typical
Start-up time:	2ms Typical, 5ms Max
Load:	50 ohms
2nd Harmonic:	-25 dBc Typical
Sub-harmonics:	None
Phase Noise Typical:	
(@100MHz)	
	10Hz -85 dBc/Hz
	100Hz -120 dBc/Hz
	1kHz -145 dBc/Hz
	10kHz -162 dBc/Hz
	100kHz -170 dBc/Hz
	1MHz -170 dBc/Hz
Aging:	<3ppm 1 st year, <1ppm every year thereafter



SUGGESTED PAD LAYOUT



PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum



Pad	Connection
1	NC
2	GND
3	OUT
4	Vdd

Rev: H
Date: 28-Mar-2018
Page 1 of 3

CCSS-945 Model
9×14 mm SMD, 5.0V, SineWave

Crystek Part Number Guide

CCSS - 945 X - 25 - 125.000

#1 #2 #3 #4 #5

#1 Crystek 9×14 SMD SineWave Clock
#2 Model 945 = Ultra Low Noise 5.0V
#3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C
#4 Stability: (see Table 1)
#5 Frequency in MHz: 3 or 6 decimal places

Example:

CCSS-945X-25-100.000
5.0V, -40/85°C, ±25ppm, 100.000 MHz

Stability Indicator

Blank ± 100ppm
50 ± 50ppm
25 ± 25ppm
20* ± 20ppm

*not available in -40/85


Table 1

Standard Frequencies MHz

10.000
50.000
80.000
100.000
122.880
125.000

RECOMMENDED REFLOW SOLDERING PROFILE
900034 (See App Note listed on website)

<http://www.crystek.com/specification/reflow/900034.pdf>

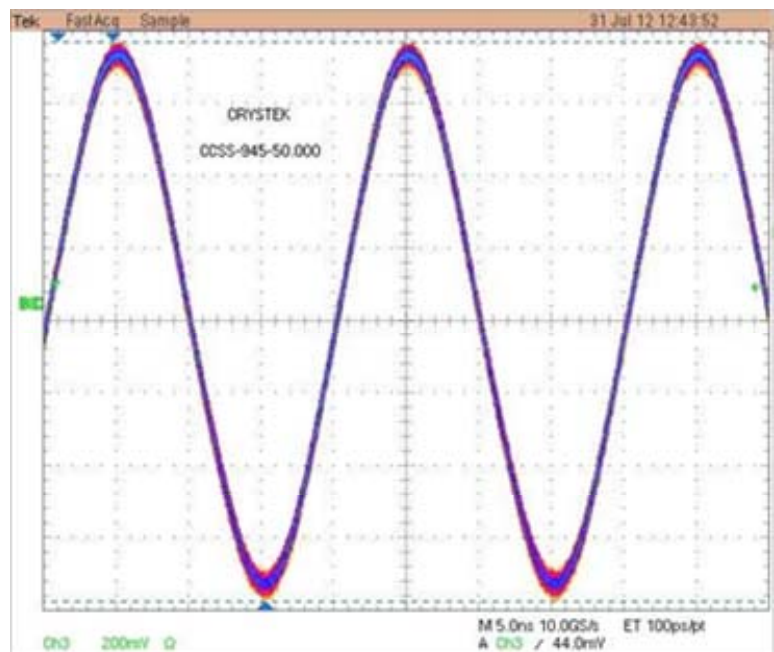

Mechanical:

Shock: MIL-STD-883, Method 2002, Condition B
Solderability: MIL-STD-883, Method 2003
Vibration: MIL-STD-883, Method 2007, Condition A
Solvent Resistance: MIL-STD-202, Method 215
Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J

Environmental:

Thermal Shock: MIL-STD-883, Method 1011, Condition A
Moisture Resistance: MIL-STD-883, Method 1004

Packaging:




Tape/Reel: 100ea, 250ea, 500ea 24mm Tape

Rev: H

Date: 28-Mar-2018

Page 2 of 3

CCSS-945 Model
9×14 mm SMD, 5.0V, SineWave

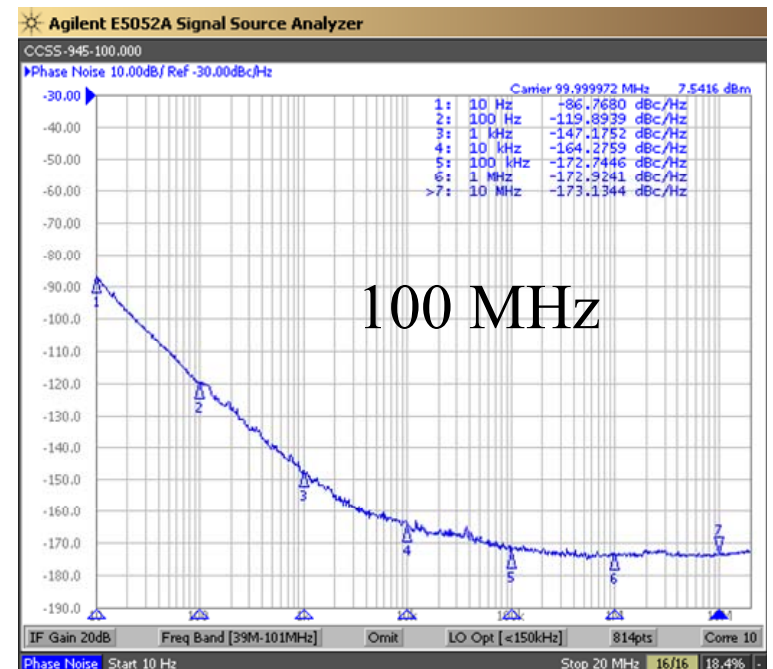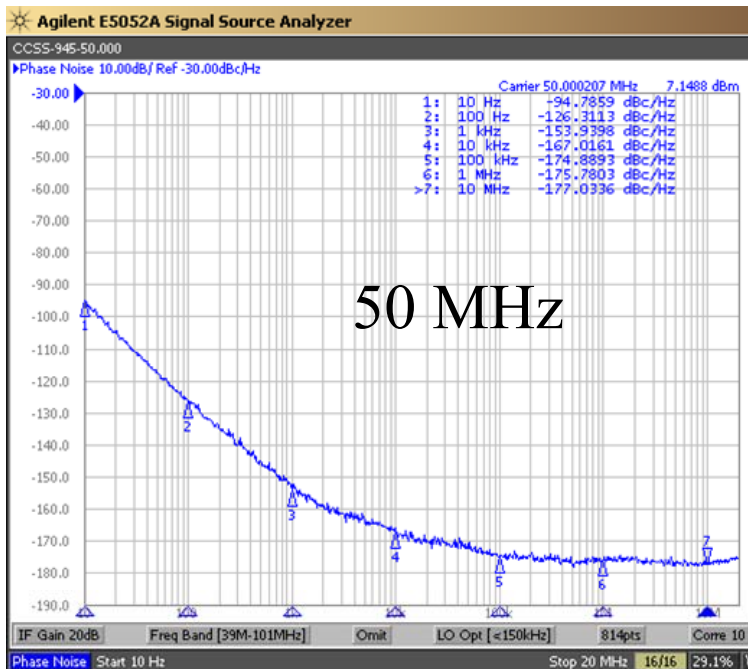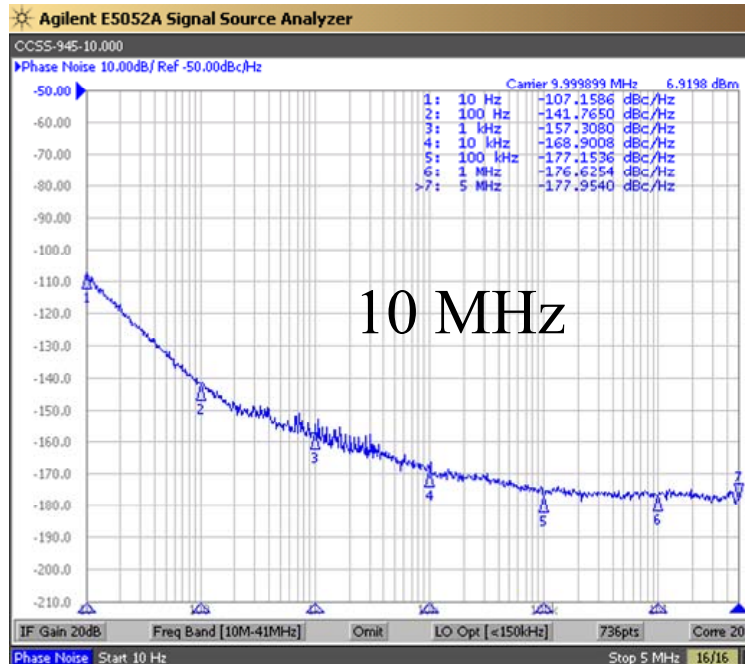

Rev: H
Date: 28-Mar-2018
Page 3 of 3