

### FEATURES

- **Miniature size: 5.0mm x 3.2mm x 1.0mm height**
- **Gold-plated ceramic base with metal seam-welded lid**
- **To minimize EMI the whole crystal may be grounded**
- **High shock and vibration resistance**
- **Ideal for PDAs, GPS, PCMCIA, Wireless LAN etc.**

### DESCRIPTION

MJ crystals are miniature surface-mount crystals produced with a ceramic substrate and seam-welded metal lid. Their compact size and low mass make them an ideal crystal for high-density applications.

### SPECIFICATION


Frequency Range:	
AT-Cut Fundamental:	7.0MHz to 50.0MHz
AT-Cut 3rd Overtone:	40.0MHz to 125.0MHz
Calibration Tolerance at 25°C:	from ±5ppm (±10, ±20 or ±30ppm standard)
Frequency stability	
-10° to +60°C	from ±5ppm
-20° to +70°C	from ±10ppm
-40° to +85°C	from ±15ppm
Storage Temperature:	-50°~+105°C
Effective Series Resistance and Mode	
7.0MHz to 50.0MHz:	50Ω max., AT-Cut Fundamental
40.0MHz to 125.0MHz:	80Ω max., AT-Cut 3rd Overtone
Operating Temperature Range:	from 0° ~ +50°C to -55° ~ +105°
Shunt Capacitance (C0):	2pF to 4pF typical, 5pF maximum
Load Capacitance (CL):	Series or from 10pF to 32pF (Customer specified CL)
Ageing:	<±3ppm per year at +25°C
Drive level:	100 μW maximum
Reflow Soldering:	10s maximum at 260°C twice or 180s at 230°C, once.
Package:	Ceramic base, metal (Kovar) lid, Hermetic seal
Packaging:	12mm EIA tape and reel 1000 pieces per reel

### ENVIRONMENTAL SPECIFICATION

RoHS Status:	Compliant
Gross Leak:	1kg pressurized water immersion test as per Euroquartz procedures.
Fine Leak:	<5x10 <sup>-8</sup> atm cc/s -helium leak test
Shock:	±5ppm max. Free drop 3 times from 75cm height onto a hard wooden board or half sine wave acceleration of 100g peak amplitude for 11 ms duration, 3 cycles each plane.
Vibration:	±5ppm max., frequency 10 to 55Hz, amplitude 1.5mm or 10g rms. Duration 6 hours.
Solderability:	MIL-STD-883, Method 2003
Humidity:	48 hours at 85°C, relative humidity, non-condensing
Thermal Shock:	Temperature cycling: Exposed to -40°C for 30 minutes then to +85°C for 30 minutes, - duration 5 days.



### OUTLINE & DIMENSIONS

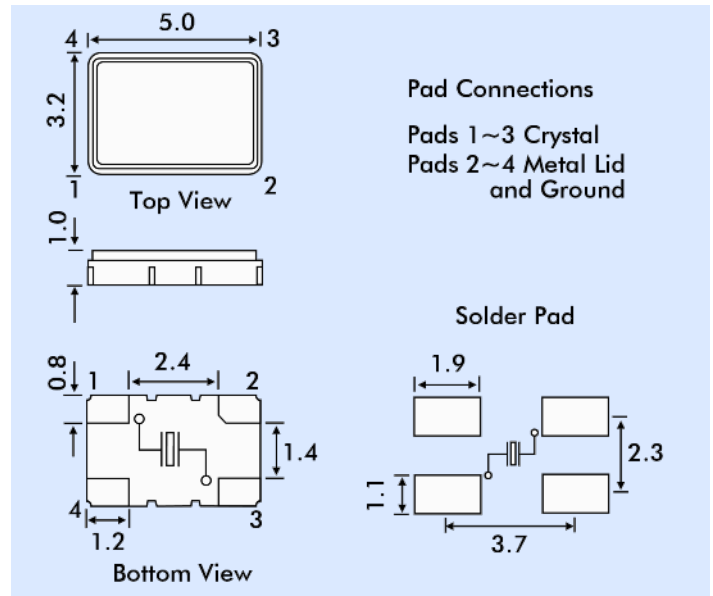

\* Note: These parts may be supplied with the chamfered pad in different positions. However, the crystal connection is always as shown above.

### PART NUMBER GENERATION

Part numbers for MJ crystals are generated as follows:

