

TW Type

5.0 x 3.2 mm SMD High Precision Voltage Controlled Temperature Compensated Crystal Oscillator


FEATURE

- Typical 5.0 x 3.2 x 1.55 mm ceramic SMD package.
- $\pm 0.2\text{ppm}$, $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$; $\pm 0.05\text{ppm}$, $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- CMOS and Clipped Sine wave (without DC-cut capacitor) output optional.


TYPICAL APPLICATION

- Base Stations, Stratum 3
- Femtocell

DIMENSION (mm)

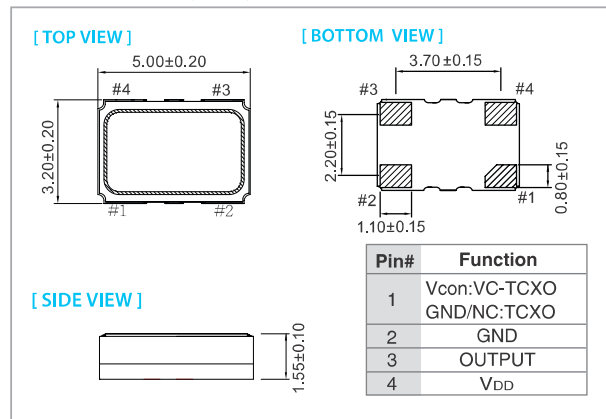

SOLDER PAD LAYOUT (mm)

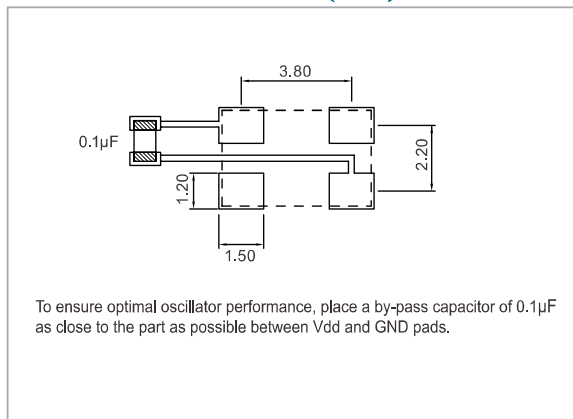

RoHS Compliant

ELECTRICAL SPECIFICATION

Parameter	5.0 V		3.3V		Unit
	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD)	VDD-5%	VDD+5%	VDD-5%	VDD+5%	V
Frequency Range	10	52	10	52	MHz
Standard Frequency (for CMOS)	10, 12.8, 13, 19.2, 20, 25, 26, 30.72				
Standard Frequency (for Clipped Sine Wave)	10, 12.8, 13, 19.2, 20, 25, 26, 30.72				
Frequency Tolerance*	—	±2.0	—	±2.0	ppm
Frequency Stability					
Vs Supply Voltage (±5%) change	—	±0.3	—	±0.3	ppm
Vs Load (±10%) change	—	±0.2	—	±0.2	
Vs Aging (@ 1st year)	—	±1.0	—	±1.0	
Supply Current (CMOS output)					
10 MHz≥ Fo ≥40 MHz	—	6	—	6	mA
40 MHz> Fo ≥52 MHz	—	8	—	8	
Supply Current (Clipped Sine Wave)	—	3.5	—	3.5	
Output Level (CMOS)	Output High (Logic “1”) 90%VDD	—	90%VDD	—	V
	Output Low (Logic “0”) Duty	—	10%VDD	10%VDD	
	45	55	45	55	%
Output Level (Clipped Sine Wave)	0.8	—	0.8	—	Vp-p
Lead (CMOS)	15pF		15pF		
Lead (Clipped Sine Wave)	10 KΩ // 10pF		10 KΩ // 10pF		
Control Voltage Range (VCTCXO)	0.5	2.5	0.5	2.5	V
Pulling Range (VCTCXO)	±5.0	—	±5.0	—	ppm
Vc Input Impedance (VCTCXO)	100	—	100	—	kΩ
Phase Noise @ 10 MHz	100 Hz	-125	-125		dBc/Hz
	1 kHz	-145	-145		
	10 kHz	-150	-150		
Start time	—	2	—	2	mSec
Storage Temp. Range	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position. * Frequency at 25°C, 1 hour after reflow.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±0.05	±0.1	±0.2	±0.28	±0.5
-10 ~ +70	○	○	○	○	○	○
-20 ~ +70	×	○	○	○	○	○
-40 ~ +85	×	×	○	○	○	○

* ○: Available △: Conditional X: Not available